


Sealed Blind Rivets Domed Head

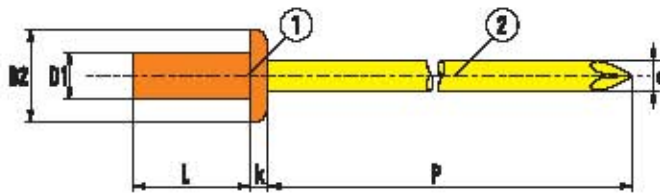

- ① Copper alloy
- ② Steel with protection layer

Ø 3.2 mm

$D1 = 3,2 + 0,08 / - 0,10$ mm

$D2 = 6,0 + / - 0,24$ mm

$k = \leq 1,4$ mm

$d = 1,75$ mm

$P = \geq 27$ mm

$L = +1 / - 0,2$ mm

= 3,3 mm

3,2 x 6,5 mm	0,5 - 2,0 mm	CSD 32650 CE	1000	850 N	1300 N
3,2 x 8,0 mm	2,0 - 3,5 mm	CSD 32800 CE	1000		
3,2 x 9,5 mm	3,5 - 5,0 mm	CSD 32950 CE	1000		
3,2 x 12,5 mm	5,0 - 8,0 mm	CSD 32125 CE	1000		

Ø 4,0 mm

$D1 = 4,0 + 0,08 / - 0,15$ mm

$D2 = 8,0 + / - 0,29$ mm

$k = \leq 1,7$ mm

$d = 2,2$ mm

$P = \geq 27$ mm

$L = +1 / - 0,2$ mm

= 4,1 mm

4,0 x 8,0 mm	0,5 - 3,5 mm	CSD 40800 CE	500	1350 N	2000 N
4,0 x 10,0 mm	3,5 - 5,0 mm	CSD 40100 CE	500		

Ø 4,8 mm

$D1 = 4,8 + 0,08 / - 0,15$ mm

$D2 = 9,5 + / - 0,29$ mm

$k = \leq 2,0$ mm

$d = 2,65$ mm

$P = \geq 27$ mm

$L = +1 / - 0,2$ mm

= 4,9 mm

4,8 x 9,5 mm	1,0 - 5,0 mm	CSD 48950 CE	250	1950 N	2800 N
4,8 x 11,5 mm	5,0 - 6,5 mm	CSD 48115 CE	250		