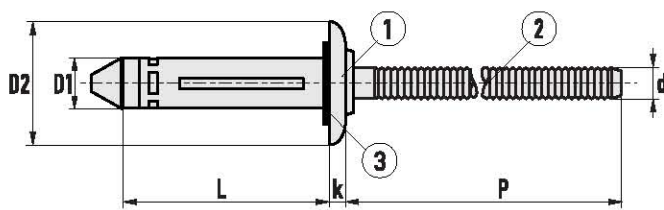


Triple Claw Blind Rivets (construction)

Domed Head with grooved mandrel



- ① Aluminium AIMg 5
- ② Aluminium AlCuMg 1
- ③ with neoprene washer

Ø 5,2 mm

$D1 = 5,2 + 0,09 / - 0,2 \text{ mm}$

$D2 = 11,7 + 0 / - 0,8 \text{ mm}$






$k = 2,2 + / - 0,3 \text{ mm}$

$d = 3,0 \text{ mm}$

$P \geq 27 \text{ mm}$

$L = +0,5 / -0,8 \text{ mm}$

 = 5,3 - 5,5 mm

		CODE			
5,2 x 17,5 mm	0,5 - 4,8 mm	AAD 05217 SB	250	3290 N	2040 N
5,2 x 19,1 mm	1,5 - 6,4 mm	AAD 52190 SB	250		
5,2 x 22,2 mm	4,8 - 9,5 mm	AAD 52220 SB	250		
5,2 x 25,4 mm	7,9 - 12,7 mm	AAD 52250 SB	250		
5,2 x 28,6 mm	11,1 - 15,9 mm	AAD 52280 SB	250		
5,2 x 31,8 mm	14,3 - 19,1 mm	AAD 52310 SB	250		