


# High-Strength Blind rivets Domed Head

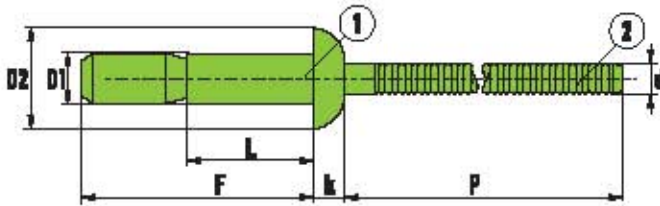

- ① Stainless steel A2 [AISI 302]
- ② Stainless steel A2 [AISI 304]

## Ø 4,8 mm

$D1 = 4,8 \text{ mm}$   
 $D2 = 10,0 + 0 / -1 \text{ mm}$   
 $k = 2,2 + / - 0,25 \text{ mm}$   
 $d = 3,0 \text{ mm}$   
 $P \geq 27 \text{ mm}$   
 $L = + / - 0,99 \text{ mm}$   
 = 4,9 - 5,1 mm

	F max		CODE			
4,8 x 10,5 mm	18,5 mm	1,6 - 6,9 mm	BBD 04810 CL	250	5800 N	4200 N
4,8 x 14,5 mm	25 mm	1,6 - 11,0 mm	BBD 04814 CL	250		

## Ø 6,4 mm

$D1 = 6,4 \text{ mm}$   
 $D2 = 13,5 + 0 / -1,5 \text{ mm}$   
 $k = 3,0 + / - 0,4 \text{ mm}$   
 $d = 4,0 \text{ mm}$   
 $P \geq 31 \text{ mm}$   
 $L = + / - 0,99 \text{ mm}$   
 = 6,6 - 6,9 mm

	F max		CODE			
6,4 x 14,5 mm	25,5 mm	2,0 - 9,5 mm	BBD 06414 CL	250	10500 N	8000 N
6,4 x 20,5 mm	36 mm	2,0 - 15,9 mm	BBD 06420 CL	250		