


Blind Rivet Nuts (Inserts) reduced Head

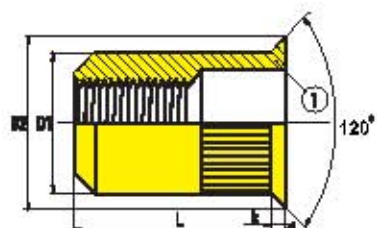

Round shank knurled open type

① Steel zinc plated

M 3

D1 = 4,9 mm
D2 = 5,8 +/- 0,3 mm
k = 0,5 +/- 0,2 mm
L = +/- 0,2 mm

= 5 mm

| M3 X 8,8 mm | 0,5 - 2,0 mm | XZW M3X8.8 | 250 | 2,0 Nm | 1490 N | 2500 N | |
|--------------|--------------|-------------|-----|--------|--------|--------|--|
| M3 X 11,0 mm | 2,0 - 3,0 mm | XZW M3X11.0 | 280 | 2,0 Nm | 1490 N | 2800 N | |

M 4

D1 = 5,9 mm
D2 = 7,0 +/- 0,3 mm
k = 0,5 +/- 0,2 mm
L = +/- 0,2 mm

= 6 mm

| M4 X 10,5 mm | 0,5 - 2,0 mm | XZW M4X10.6 | 280 | 2,5 Nm | 2720 N | 5950 N | |
|--------------|--------------|-------------|-----|--------|--------|--------|--|
| M4 X 13,0 mm | 2,0 - 3,0 mm | XZW M4X13.0 | 280 | 2,5 Nm | 2720 N | 5950 N | |

M 5

D1 = 6,9 mm
D2 = 8,2 +/- 0,3 mm
k = 0,5 +/- 0,2 mm
L = +/- 0,2 mm

= 7 mm

| M5 X 12,5 mm | 0,5 - 2,0 mm | XZW M5X12.6 | 280 | 5,2 Nm | 3330 N | 3400 N | |
|--------------|--------------|-------------|-----|--------|--------|--------|--|
| M5 X 15,0 mm | 2,5 - 4,0 mm | XZW M5X15.0 | 280 | 5,2 Nm | 3330 N | 3400 N | |

M 6

D1 = 8,9 mm
D2 = 10,5 +/- 0,3 mm
k = 0,6 +/- 0,2 mm
L = +/- 0,2 mm

= 9 mm

| M6 X 15,0 mm | 0,5 - 3,0 mm | XZW M6X15.0 | 250 | 10,4 Nm | 5090 N | 6940 N | |
|--------------|--------------|-------------|-----|---------|--------|--------|--|
| M6 X 17,0 mm | 3,0 - 8,0 mm | XZW M6X17.0 | 250 | 10,4 Nm | 5090 N | 6940 N | |

M 8

D1 = 10,9 mm
D2 = 12,4 +/- 0,3 mm
k = 0,7 +/- 0,2 mm
L = +/- 0,2 mm

= 11 mm

| M8 X 17,0 mm | 0,5 - 3,0 mm | XZW M8X17.0 | 290 | 19,9 Nm | 6990 N | 10300 N | |
|--------------|--------------|-------------|-----|---------|--------|---------|--|
| M8 X 19,0 mm | 3,0 - 8,0 mm | XZW M8X19.0 | 290 | 19,9 Nm | 6990 N | 10300 N | |

M 10

D1 = 11,9 mm
D2 = 13,6 +/- 0,3 mm
k = 0,8 +/- 0,2 mm
L = +/- 0,2 mm

= 12 mm

| M10 X 19,0 mm | 0,5 - 2,5 mm | XZW M10X19.0 | 250 | 17,8 Nm | 6150 N | 14210 N | |
|---------------|--------------|--------------|-----|---------|--------|---------|--|
| M10 X 21,0 mm | 3,0 - 8,0 mm | XZW M10X21.0 | 250 | 17,8 Nm | 6150 N | 14210 N | |

Note: D1=12.9 mm also available upon request.